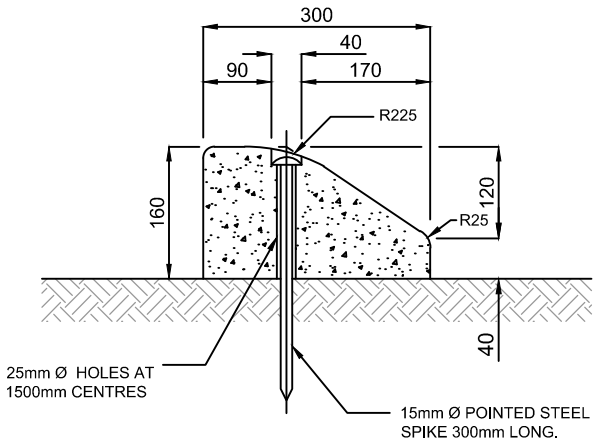

SPIKED SM1 (CAST IN-SITU)

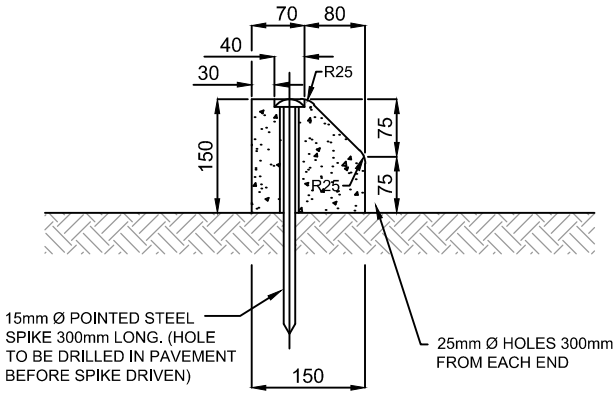

SPIKED BARRIER KERB (PRECAST)

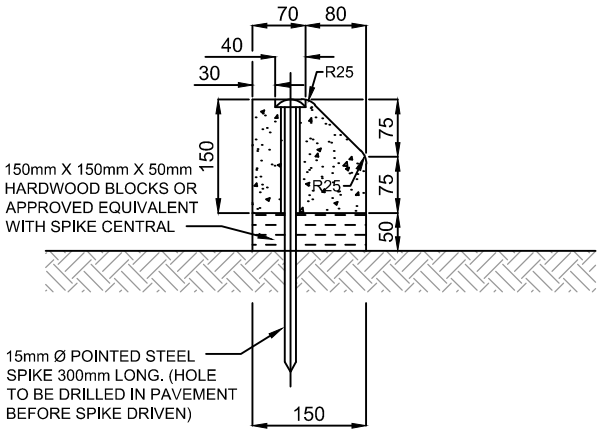

NOTE: THIS DETAIL TO BE FOLLOWED FOR APPLICATIONS WHEREBY THE SPIKED KERBING INTERUPTS THE FLOW OF DRAINAGE OR AS DIRECTED BY WSC.

SPIKED BARRIER KERB (PRECAST) ON BLOCKS

NOTES:
1. SPIKES TO BE HOT DIPPED GALVANISED.
2. CONCRETE MIX TO BE 280KG CEMENT PER CUBIC METRE OF CONCRETE

REV.	DATE	REVISION DESCRIPTION	DRN.	APPD.
A	9/10/15	ORIGINAL ISSUE	S.W.	S.P.

Wentworth Shire Council
26-28 ADELAIDE STREET,
WENTWORTH, N.S.W. 2648.
Telephone: (03) 5027 5027
Fax: (03) 5027 5000
E-mail: council@wentworth.nsw.gov.au

GENERAL NOTES:
1. DRAWING NOT TO BE SCALED.
2. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
3. FOR UP-TO-DATE DRAWINGS PLEASE CONTACT WENTWORTH SHIRE COUNCIL (WSC) OR CHECK THE WSC WEBSITE.
4. ALL STANDARD DRAWINGS ARE TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).

STANDARD DRAWINGS

STANDARD SPIKED KERBS

DATE CREATED:	DRG. NO:	REV:
9/10/15	SD1-4	A

Drawing name: E:\my documents\0work\0jobs\3WC\standards development\standard drawings\SD1-4 REV A.dwg (05 Nov, 2015)