


SECTION A-A

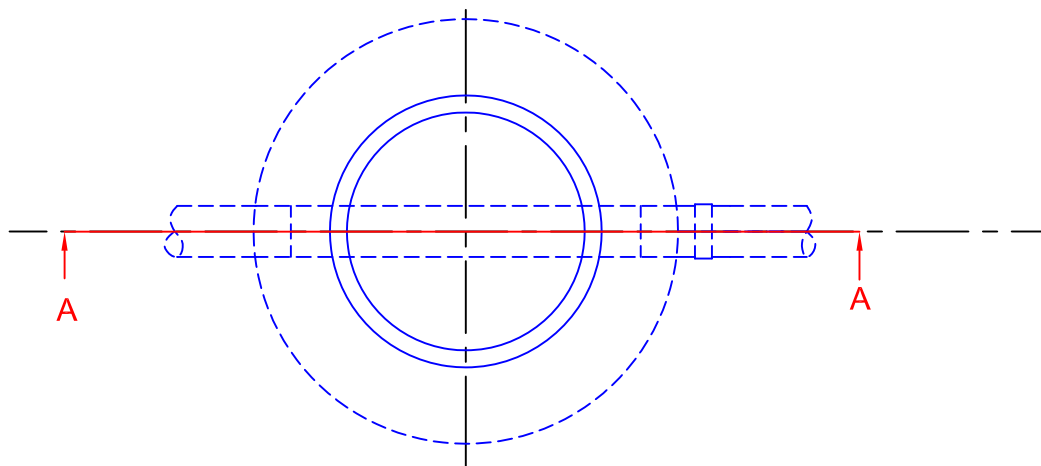

PLAN

NOTES:

1. Pipe specifications as directed by Engineer.
2. Location of drains are examples only. Check plans for drain location and entry points into manhole.
3. Step Irons to be provided in all pits greater than 1.5m.
4. Naturestrip non trafficed areas within properties light weight lid. Naturestrip trafficed areas medium weight lid. Roads with heavily trafficed areas heavy weight lid.
5. Min. manhole depth 1.00m.
6. Cross slope of pit flow 10% towards flow channel.
7. Excavation deeper than 1.5m requires trench shoring in accordance with Australian Standards.
8. Bottom of manhole is to be shaped to springing line of inlet and outlet pipes to assist and control flow through manhole.
9. Cutting in of junction is permitted with approval of Shire Council.
10. Difference in inlet and outlet inverts, refer sewer design.