



Dimensions are in millimetres



Mark number on brass plate inside lid of cover box

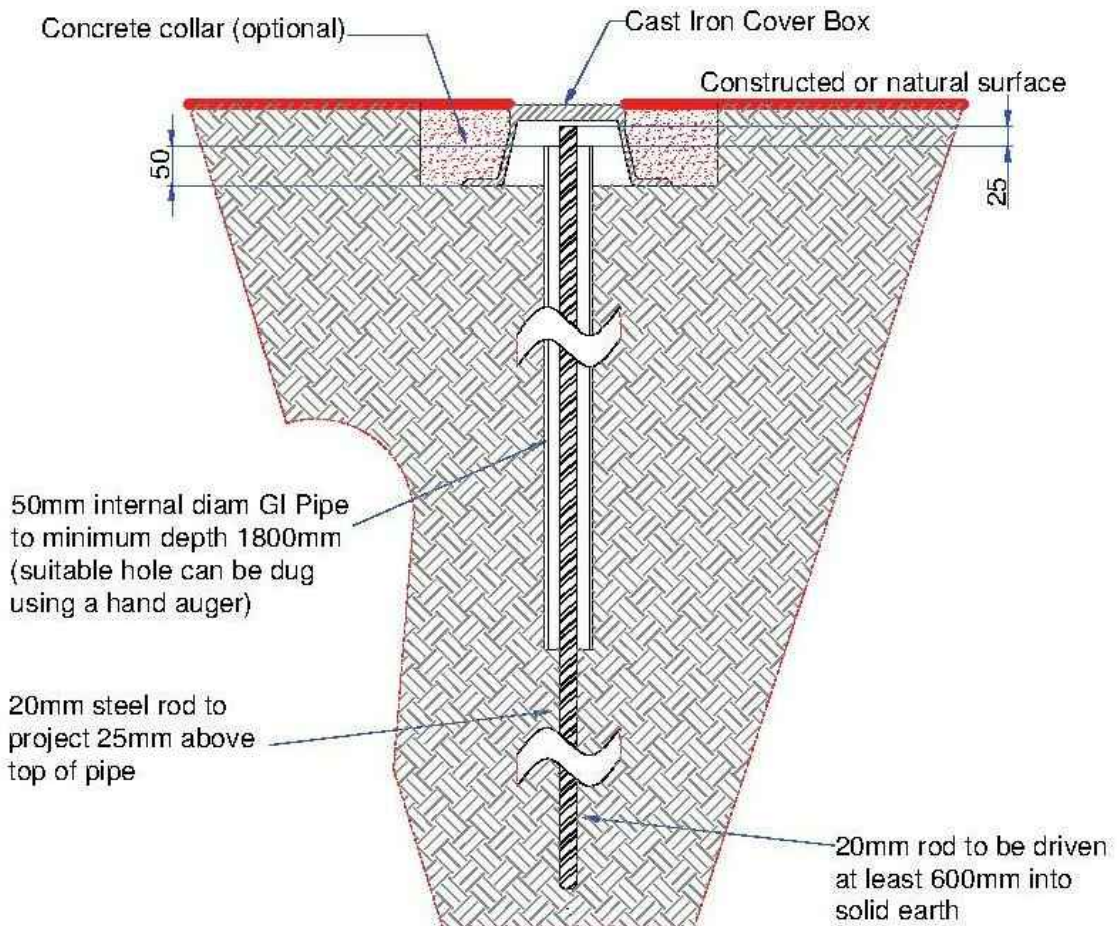

PERMANENT MARK TYPE 8 AS PER SURVEYOR GENERAL'S DIRECTION NO. 1

NOTES :

1. PSM TO BE LOCATED WITHIN FOOTPATH AREA.
2. LEVEL TO BE REDUCED TO A.H.D.
3. REFERENCE TO BE TO G.D.A. 94 CO-ORDINATES IN THE PROJECTION OF M.G.A. ZONE 54.
4. MINIMUM CONCRETE STRENGTH OF 25MPa AT 28 DAYS.
5. LEVELS & COORDINATES TO BE LODGED WITH WENTWORTH SHIRE COUNCIL'S ASSETS DEPARTMENT.

A	2/11/15	ORIGINAL ISSUE		S.W.	S.P.
REV.	DATE	REVISION DESCRIPTION		DRN.	APPD.

GENERAL NOTES:

1. DRAWING NOT TO BE SCALED.
2. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
3. FOR UP-TO-DATE DRAWINGS PLEASE CONTACT WENTWORTH SHIRE COUNCIL (WSC) OR CHECK THE WSC WEBSITE.
4. ALL STANDARD DRAWINGS ARE TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).

**WENTWORTH
SHIRE COUNCIL**
WORTH THE DRIVE

STANDARD DRAWINGS

PERMANENT SURVEY MARK
HIGH STABILITY

DATE CREATED:
2/11/15

DRG. NO:

SD11-10

REV:
A